




www.soflooring.com

Lee Floorstok
Unit B1 The Dresser Centre
Whitworth Street
Manchester
M11 2NE
Tel: 0161 231 8080
Fax: 0161 231 8787
Email: leefloor@aol.com
Web: leefloorstok.com

Data Sheet

SO NYLON

CARPET TILES

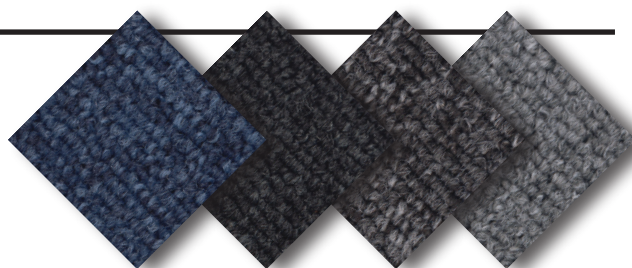

INSTALLATION

Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For tiles use SO Carpet or SO Tack from our adhesive range.

Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use.

Tiles may be laid tessellated or broadloom

COLOUR

For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

MAINTENANCE

It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately.

For detailed information, please consult the So Flooring Products cleaning and maintenance guide.

It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of suitable barrier matting, such as SO Klean also available from SO Flooring Products.

Style:	Tufted 1/10" Loop Pile Tile
Fibre Construction:	100% Solution Dyed Nylon
Pile Yarn Weight:	500 gsm
Pile Height:	3mm
Total Weight	4280 gsm
Total Thickness:	5.5mm (Tile)
Backing:	100% Envirobase - minimum of 75% recycled material
Additional Backing:	100% Komfort Bac available on request
Tile Size	50cm x 50cm
Wear Classification	Heavy Contract Class 33
Luxury Class:	LC1
Anti-static:	<2Kv body voltage. Suitable for use with computers
Static Load to BS 4939:	Not less than 80% recovery after 24 hours
Colour fastness to BS1006:	To Light (BS EN ISO105-B02) Better than 6
	To Shampoo BS 1006 - UK - TB Change in shade 4 - 5
	To Rubbing (BS EN ISO105-X12) Wet 4 - 5, Dry 4 - 5
Flammability:	Floorcoverings tested to BS4790 Low Radius of Char
	(Hot Metal Nut Test)
	Euroclass Flammability Bfl-s1
	(BS EN 13501)
Castor Chair Test:	Suitable for use with castor chairs
Warranty:	10 Years
VOC Content:	E1 in relation to EN 14041:2004
Environmental Status Breeam® 'A+' Rated	
SO Nylon can be laid tessellated or broadloom	